

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
1 July 2004 (01.07.2004)

PCT

(10) International Publication Number  
**WO 2004/054908 A1**

- (51) International Patent Classification<sup>7</sup>: **B65G 65/48**, B65D 88/68
- (74) Agent: DR LUDWIG BRANN PATENTBYRÅ AB; P.O. Box 171 92, S-104 62 Stockholm (SE).
- (21) International Application Number: PCT/SE2003/001946
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 15 December 2003 (15.12.2003)
- (25) Filing Language: Swedish
- (84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (26) Publication Language: English
- (30) Priority Data: 0203696-0 13 December 2002 (13.12.2002) SE
- (71) Applicant (*for all designated States except US*): SAXLUND INTERNATIONAL AB [SE/SE]; PO Box 79, S-137 22 Västerhaninge (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): NORDSTRÖM, Gunnar [SE/SE]; Grevgatan 5, S-149 34 Nynäshamn (SE).
- Published:  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: OUTPUT DEVICE FOR CONTAINER

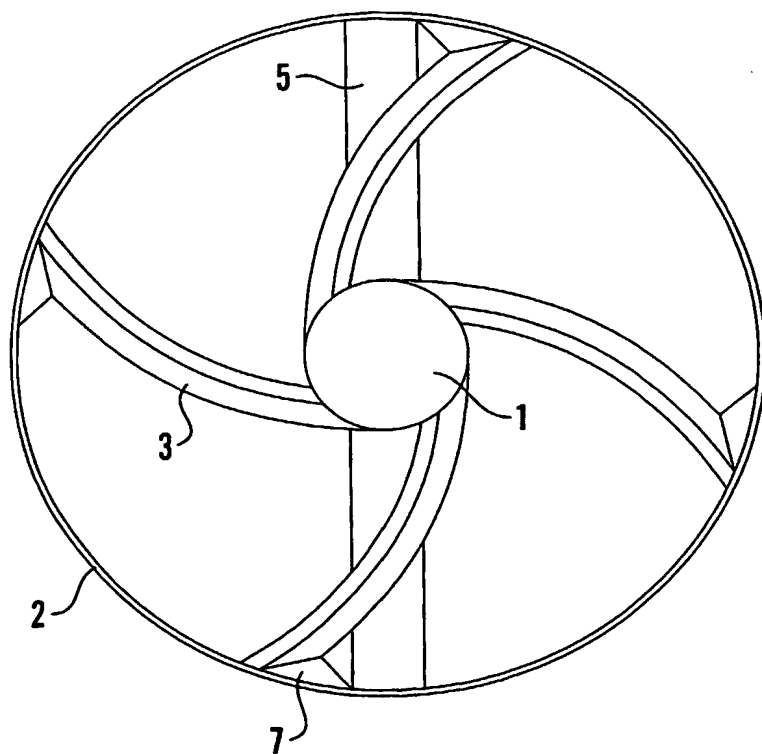

(57) Abstract: Output device for a container (6) which comprises a bottom and a surrounding wall, comprising a hub (1) and at least two arms (3) fixed to the hub (1). The invention is characterized in that each arm (3) is designed with at least one outer section designed and arranged to at use being capable of essentially preventing material from being brought towards the wall of the container, and at least one inner section connected to the outer section, designed and arranged to at use being capable of bringing the material essentially in the direction of feed to for the device, at which the at least two arms (3) present essentially concave surfaces facing the direction of feed.